
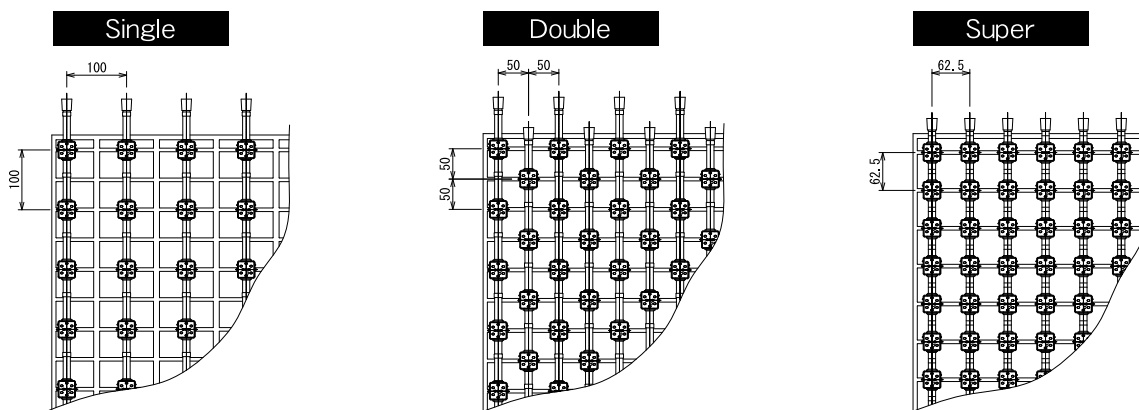


## System configuration

※ The system is composed as an example of W7,200mm x H5,400mm.

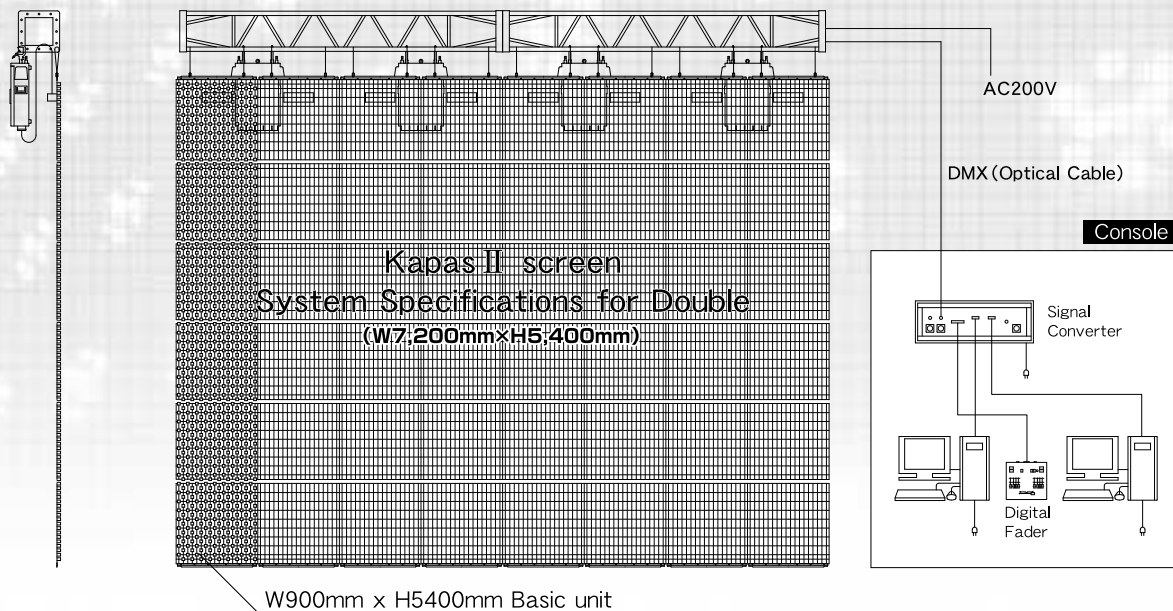

## Kapas II basic specification

Item	Specifications	Specifications		
		Single	Double	Super
Size (mm)	Standard Size	W7200 x H5400		W8000 x H5000
	Basic unit	W900 x H5400		W1000 x H5000
Net Weight (Kg) 【Excluding Power Unit】	Standard Size	360	505	535
	Basic unit	45	65	70
Gross Weight (Kg) 【Including Power Unit】	Standard Size	590	735	820
	Basic unit	105	121	105
Cluster pitch		100mm □□	100mm □□	62.5mm □□
Number of Clusters	Standard Size	3888	7776	10240
	Basic unit	486	972	1280
Luminous intensity at white peak (cd/pixel)		6.57		
Luminance at white peak (cd/m <sup>2</sup> )		657	1314	1682

Item	Specifications	Specifications		
		Single	Double	Super
Power Supply Unit	Weight (Kg)	33		33.5
	Size (mm)	740 x 650 x 149		805 x 620 x 135
Distributor	Weight (Kg)	16.25		
	Size (mm)	700 x 290 x 120		
Power-supply voltage (V)		AC170 ~ 264		
Capacitance 【Apparent power】 /Standard Size (KVA)		4.57	9.14	12.035
Recommended viewing angle degree	Vertical	25° / 40°		
	Horizontal	50° / 50°		
Operating conditions		Outdoor/Indoor +10°C ~ +45°C		

- All specification and design are subject to change without notice due to continual improvements.
- If you have any inquiry, please feel free to contact us.
- Updated March, 2007.